

### Repair Panels

Gyprock Repair Panels are conveniently sized pieces of plasterboard used for repairing holes and other damage in plasterboard walls and ceilings. Repair panels are cut from Gyprock Plus 10mm plasterboard, making them lightweight, strong, easy to handle and extremely durable. Gyprock repair panels are available in two sizes including:


- **Repair Panel** – available as a 1200mm long by 900mm wide panel with the shorter edges recessed for flush jointing.
- **Mini Repair Panel** – available as a 530mm wide by 530mm long panel and ideal for smaller wall and ceiling repairs. These panels are suitable for use in 600mm x 600mm access frame kits.

### Recommended Use

- Repairs of wall and ceiling applications that have no specific fire, acoustic or moisture resistance requirements.
- Reparation of holes and damage including dents and scrapes in residential projects.



### Product Features



#### Two Handy Sizes

Catering for both smaller and larger repair jobs



#### Light

Easy to lift for better sheet manoeuvrability and improved flex



#### Easy Score and Snap

For crisp edges and cleaner cuts



#### Australian Made

Licensed by Australian Made Campaign Ltd

#### Gyprock Repair Panel Specifications

Feature	Repair Panel	Mini Repair Panel
Thickness	10mm	10mm
Widths	900mm	530mm
Lengths	1200mm	530mm
Edge Profiles	Recessed Edge/ Recessed Edge Square Edge	
Paper Colour	Ivory	
Mass	5.7kg/m <sup>2</sup>	
Thermal Performance R-Value	0.07 m <sup>2</sup> K/W	
Fire Hazard Properties <sup>Δ</sup>	Group Number =1 SMOGRARC <100 m <sup>2</sup> /s <sup>2</sup>	
Combustibility <sup>◇</sup>	Plasterboard may be used wherever a non-combustible material is required by code.	

<sup>Δ</sup> In accordance with AS ISO 9705 and AS 5637.1


<sup>◇</sup> In accordance with NCC2022 Vol 1 Clause C2D10(6)(a) and NCC2019 Amdt1 Vol Clause C1.9(e)(i).

## Plasterboard Finishing

Jointing and finishing of Gyprock plasterboard interior installations is to be carried out in accordance with **FIGURE 1** and **TABLE 1** in this document, and the following details, so as to provide a smooth surface for decorating. Stopping and external corner beads are to be applied to all edges subject to damage. A Level 4 Finish is generally the accepted level of finish for residential construction as detailed in AS/NZS2589.1 and is also recommended for commercial construction. This requires a three-coat system, consisting of:

- Tape and tape coat
- Second coat and
- Finish (or topping) coat.

**FIGURE 1: SELECTING A LEVEL OF FINISH**

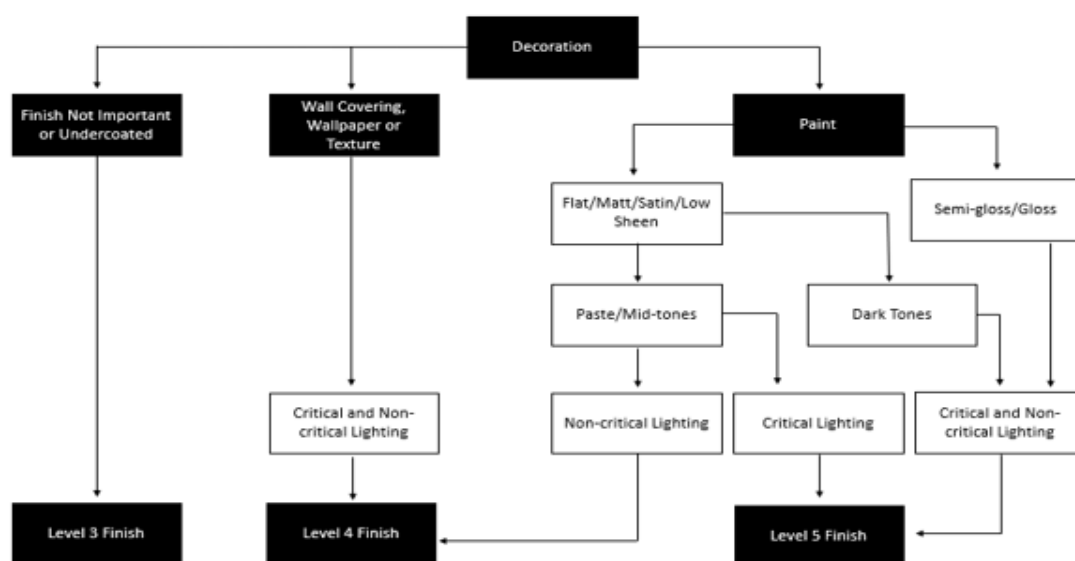

**TABLE 1: JOINTING COMPOUND SELECTION – HAND OR MECHANICAL APPLICATION**

Tape Coat Any of the following:		Second Coat Any of the following:		Finish Coat Any of the following:	
Product	Recoat Time	Product	Recoat Time	Product	Recoat Time
Base Coat 20*	35 mins	Base Coat 20*	35 mins	Jointmaster	24 hr
Base Coat 45*	60 mins	Base Coat 45*	60 mins	Ultra-Top	24 hr
Base Coat 60*	80mins	Base Coat 60*	80mins	Gold	24 hr
Base Coat 90*	120mins	Base Coat 90*	120mins	Easy-Finish	24 hr
Ultra-Base MR 60*	75 mins	Ultra-Base MR 60*	75 mins	Easy-Flow	24 hr
Easy Base	24 hr	Easy Base	24 hr	Less Mess Multi-Purpose	24 hr
Less Mess Multi-Purpose	24 hr	Less Mess Multi-Purpose	24 hr		
Easy-Flow	24 hr	Easy-Flow	24 hr		
Wet Area Base Coat	12-24 hr	Wet Area Base Coat	12-24 hr		

\*Setting type compound. Do not use a setting compound over a drying type compound.  
For protected exterior applications, use Wet Area Base Coat or Ultra-Base MR 60 for tape and second coat, followed by a Gyprock Finish Coat.



## Manufacturing Tolerances

<b>Nominal Thickness</b>	10mm +/- 0.5mm
<b>Nominal Widths</b>	0900mm and 530mm +/- 3mm
<b>Nominal Lengths</b>	530mm and 1200mm +/- 5mm,
<b>Squareness</b>	Cut ends +/- 3mm in the width of the board

\*\*Subject to reasonable manufacturing variance.

## Storage

Protect plasterboard from weather and moisture. Avoid products sagging by storing horizontally, supported on a level platform or full-width support members spaced at max. 600mm centres.

## Health and Safety

For further information refer to the Safety Data Sheet for this product which is available from [www.gyprock.com.au](http://www.gyprock.com.au) or contact:

CSR Gyprock  
Trinity 3, 39 Delhi Rd, North Ryde NSW 2113  
Australia Phone: **131 744**  
New Zealand Phone: **0800 277 123**

## Installing to Standards

Installing to Standards AS/NZS2589: Gypsum linings – Application and Finishing outlines the procedures for jointing and finishing of Gyprock plasterboard in conjunction with additional details contained in Gyprock Technical Literature.

## Resources

For further information on this product please visit [www.gyprock.com.au](http://www.gyprock.com.au) or refer to the Gyprock Red Book Residential and Commercial Installation Guides. For technical support, contact:

**DESIGNLINK™**

PHONE: 1800 621 117

## Manufactured For Life Warranty

Gyprock products are manufactured for life with all CSR products designed to achieve optimal performance when part of a CSR integrated system. Gyprock continues to lead the market with premium quality products which are the preferred choice of plastering professionals. Gyprock plasterboard products are manufactured to the Australian Standards AS2588 providing confidence in quality of product and support. For details on our product warranty, please log onto [www.gyprock.com.au/warranty](http://www.gyprock.com.au/warranty), or contact us on **1300 306 556**.



Licensed by Australian Made Campaign Limited to use the Australian Made Logo.



Verified by an independent conformity assessment body to meet the environmental, health and social/ethical criteria of the GECA Panel Boards standard.



Gyprock plasterboard products are manufactured for life with all CSR products designed to achieve optimal performance when part of a CSR integrated system.