


Supatone™ Ceiling Tiles


Gyprock Supatone Ceiling Tiles are bright white, economical plasterboard ceiling tiles that provide acoustic separation in commercial applications. Supatone Ceiling Tiles are square edged, 10mm thick and available as 1200 x 600mm tiles to suit common exposed grid systems. The tiles feature a poly-coated paper face, with Gyprock Supaceil in their core to provide sag resistance and longevity.

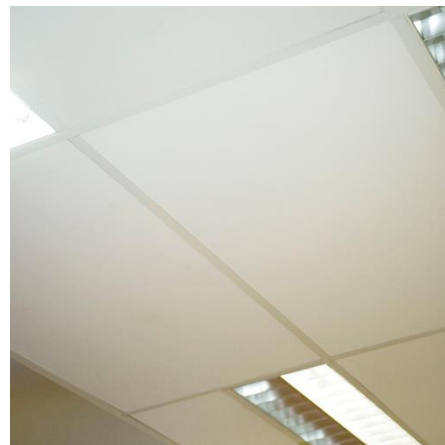

Recommended Use

- Standard suspended grid systems for interior ceiling applications
- Commercial environments such as shopping centres, offices, restaurants, factories, warehouses, and rest rooms.

Product Features



Drop-in Tile

Suitable for suspended grid systems



Bright White

High reflectance in interior applications



25 Year Warranty

Manufactured for life to provide confidence in quality of product and support.

Supatone Ceiling Tile Specifications	
Feature	Description
Thickness	10mm
Widths	600mm
Lengths	1200mm
Surface Finish	Poly-coated paper
Edge	Square
Mass	7.2kg/m ²
CAC	35
Fire Hazard Properties ^Δ	Group No = 1 SMOGR _{ARC} <100 m ² /s ²
Combustibility [◇]	Plasterboard may be used wherever a non-combustible material is required.

^Δ In accordance with AS ISO 9705 and AS 5637.1

[◇] In accordance with NCC2022 Vol 1 Clause C2D10(6)(a) and NCC2019 Amdt1 Vol Clause C1.9(e)(i).



Australian Made

Licensed by Australian Made Campaign Ltd



Storage

Protect plasterboard from weather and moisture. Avoid products sagging by storing horizontally, supported on a level platform or full-width support members spaced at max. 600mm centres.

Handling

Ensure all surfaces are clean from dust and dirt before unpacking and installation. All ceiling tiles should be handled with clean hands or gloves to prevent soiling of tile face during handling and installation. When removing tiles from pack, lift the panels from opposite ends rather than dragging panels, to avoid potential damage to the surface. If panels are removed after initial installation, they should be taken completely out of the grid and stored on a flat surface.

Cleaning

Dust, vacuum or wipe with a damp cloth to clean surface of tile. To minimise the need for significant cleaning, ensure ceiling tiles are unpacked and installed in a clean environment that is clear of dust and dirt.

Health and Safety

For further information refer to the Safety Data Sheet for this product which is available from www.gyprock.com.au or contact:

CSR Gyprock
Triniti 3, 39 Delhi Rd, North Ryde NSW 2113 Australia
Phone: **131 744**
New Zealand Phone: **0800 277 123**

Installing to Standards

Installing to Standards AS/NZS2589: Gypsum linings – Application and Finishing outlines the procedures for jointing and finishing of Gyprock plasterboard in conjunction with additional details contained in Gyprock Technical Literature.

Resources

For further information on this product please visit www.gyprock.com.au or refer to the Gyprock Red Book. For technical support, contact:

DESIGNLINK™

PHONE: 1800 621 117

Manufactured For Life Warranty

Gyprock products are manufactured for life with all CSR products designed to achieve optimal performance when part of a CSR integrated system. Gyprock continues to lead the market with premium quality products which are the preferred choice of plastering professionals. Gyprock plasterboard products are manufactured to the Australian Standards AS2588 providing confidence in quality of product and support. For details on our product warranty, please log onto www.gyprock.com.au/warranty, or contact us on **1300 306 556**.



Licensed by Australian Made Campaign Limited to use the Australian Made Logo.



Verified by an independent conformity assessment body to meet the environmental, health and social/ethical criteria of the GECA Panel Boards standard.



Gyprock plasterboard products are manufactured for life with all CSR products designed to achieve optimal performance when part of a CSR integrated system.