


Product Data Sheet

Supatone™ Ceiling Tiles

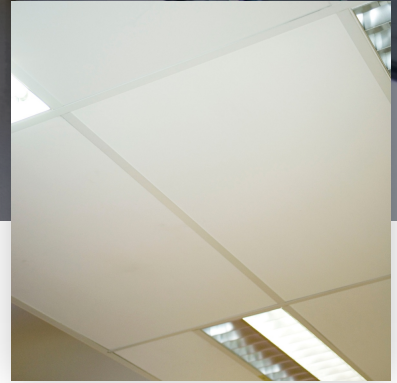

Gyprock Supatone Ceiling Tiles are bright white, economical plasterboard tiles that provide acoustic separation in commercial applications.

Product Overview

Supatone Ceiling Tiles are squared edged, 10mm thick and available as 1200mm x 600mm tiles to suit common exposed grid systems. The tiles feature a poly-coated paper face. With Gyprock Supaceil in their core, they are sag resistant to provide longevity.

Typical Applications

Supatone Ceiling Tiles are designed to suit standard suspended grid systems, typically in commercial construction. Suitable for a range of commercial environments, Supatone Ceiling Tiles are often used in shopping centres, offices, restaurants, factories and warehouses.



Bright White

High reflectance in interior applications



Ceiling Tile

Suitable for suspended grid systems



25 Year Warranty

Specify and install with confidence

Technical Specifications

Product Options

Supatone Ceiling Tiles are available in the following size:

Thickness	10mm
Width	600mm
Length	1200mm

Stockholdings may vary. For product availability and to place an order, contact your **nearest supplier**.

Product Manufacture

Supatone Ceiling Tiles are manufactured for CSR Gyprock in Australia to stringent product specifications.

Product Handling

Transportation and manual handling: Refer to the **Gypsum Board Manufacturers of Australia (GBMA) website** for recommended OH&S practices.

Storage: Protect from weather and moisture. Avoid products sagging by storing horizontally, supported on a level platform or full-width support members spaced at max. 600mm centres.

Health and Safety

Safety Data Sheets are important documents in the construction industry and assist in the continuing focus on occupational health and safety on and off sites.

Physical Properties

Nominal Weight*	7.2kg/m ²
Fire Hazard assessed to AS/NZS3837 cone calorimeter test	Average Specific Extinction Area (ASEA) < 250 m ² /kg Group Number 1 Report Reference WFRA 45759
Combustibility	In accordance with BCA Clause C1.12, Gyprock Supatone may be used wherever a non-combustible material is required by the Code.

*Subject to reasonable manufacturing variance.

Installation Instructions

Resources

Gyprock makes available **resources** that provide comprehensive selection, design, installation and maintenance guidance.



Manufactured for Life

Gyprock products are manufactured for life with all CSR products designed to achieve optimal performance when part of a CSR integrated system.