



## Cove Cornice

Cove Cornice is an attractive and simple profile that effectively bridges the junctions between walls and ceilings. Its purpose extends beyond function, providing the perfect finishing touch to the aesthetic harmony of a home. When balanced with other interior design features such as architraves, skirting and even door hardware, cornice can help make a subtle or dramatic style statement in a home.



Cove cornice is identified by its simple curve design and is available in 55mm, 75mm or 90mm sizes to suit different ceiling heights and applications

## Recommended Use


- Attractive junction for wall and ceiling applications.
- New residential and commercial construction.
- Utility rooms or other interior areas of the home that require a clean finish such as bathrooms, laundries, and closets.

## Design & Installation Considerations

Gyprock Cornice can be applied to Gyprock plasterboard, fibrous plaster or cement rendered surfaces. It is available in a range of profiles and styles that are lightweight and easy to install. Smaller profile sizes can improve the perception of height and space in rooms with lower ceilings. Larger profiles add grandeur and detail. A combination of profiles with similar styling adds detail to a home, and differentiates feature design zones from utility spaces.

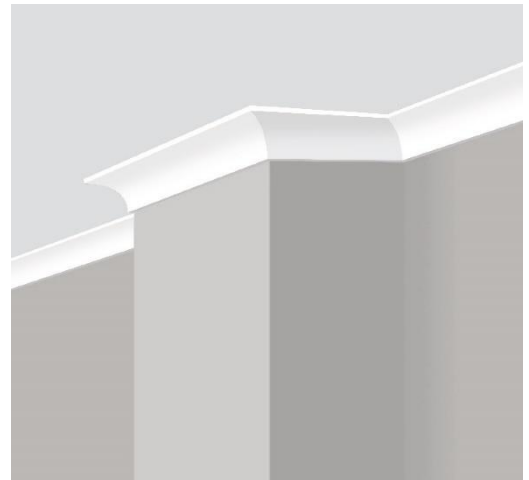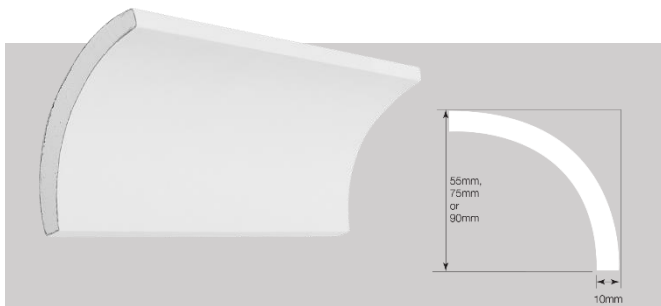


## Product Features




### 3 Different Profile Sizes

Available in a range of sizes to suit a variety of ceiling heights and applications.



### Pairing

Combine with a feature profile for added interest.



### Simple Design

Simple and functional profile that suits all decors and allows other architectural design features to shine.



### Australian Made

Licensed by Australian Made Campaign Ltd.



## Installation

These details are specific to cornice installation. Gyprock Cornice Cement 45/60/90 is formulated for adhesion of cornice to plasterboard surfaces. Gyprock Masonry Adhesive is recommended for installing cornice on to highly absorbent surfaces or to materials other than plasterboard.

When used in hot and dry conditions, the water in the mix of cornice cements can evaporate or be absorbed into the dry lining surfaces. This situation may lead to the cement not setting correctly and lacking in strength.

In severe drying conditions, mix only small quantities of cement and allow to stand for 10-15 minutes to ensure setting occurs quickly after application. Depending on the severity of the drying conditions, contact surfaces may require dampening with a water brush before applying cement.

### Cove Cornice Specifications

Feature	Description
<b>Widths</b>	55mm/75mm/90mm
<b>Lengths</b>	3000mm/3600mm/4800mm /5400mm
<b>Coverage</b>	12kg of Gyprock Cornice Cement will fix approximately 100 metres of cornice.

## Storage

Protect cornice from weather and moisture. Avoid products sagging by storing horizontally, supported on a level platform or full-width support members spaced at max. 600mm centres.

## Health and Safety

For further information refer to the Safety Data Sheet for this product which is available from [www.gyprock.com.au](http://www.gyprock.com.au) or contact:

CSR Gyprock  
Trinit 3, 39 Delhi Rd, North Ryde NSW 2113  
Australia Phone: **131 744**  
New Zealand Phone: **0800 277 123**

## Installing to Standards

Installing to Standards AS/NZS2589: Gypsum linings – Application and Finishing outlines the procedures for jointing and finishing of Gyprock plasterboard in conjunction with additional details contained in Gyprock Technical Literature.

## Resources

For further information on this product please visit [www.gyprock.com.au](http://www.gyprock.com.au) or refer to the Gyprock Red Book Residential and Commercial Installation Guides. For technical support, contact:

**DESIGNLINK™**

PHONE: 1800 621 117

## Manufactured For Life Warranty

Gyprock products are manufactured for life with all CSR products designed to achieve optimal performance when part of a CSR integrated system. Gyprock continues to lead the market with premium quality products which are the preferred choice of plastering professionals. Gyprock plasterboard products are manufactured to the Australian Standards AS2588 providing confidence in quality of product and support. For details on our product warranty, please log onto [www.gyprock.com.au/warranty](http://www.gyprock.com.au/warranty), or contact us on **1300 306 556**.



Licensed by Australian Made Campaign Limited to use the Australian Made Logo.



Gyprock plasterboard products are manufactured for life with all CSR products designed to achieve optimal performance when part of a CSR integrated system.