


Product Data Sheet

DIY Acrylic Stud Adhesive

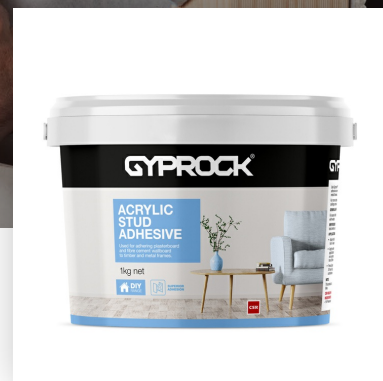

Gyprock DIY Acrylic Stud Adhesive is a pre-mixed adhesive used for fixing Gyprock plasterboard and fibre cement wallboard to timber or steel frames.

Product Overview

Part of Gyprock's DIY range, Acrylic Stud Adhesive is easy to use and easy to clean as it is acrylic based and water-soluble.

Used in conjunction with permanent fasteners, Acrylic Stud Adhesive provides superior bond strength between the plasterboard sheet and wall or ceiling frame. The formula is stable and won't skin in hot weather or thicken in cold weather.

Acrylic Stud Adhesive is also easy to identify thanks to its distinctive blue colour.

For adhering plasterboard to masonry walls, use Gyprock Masonry Adhesive or, in WA only, Gyprock Masonry Adhesive 100.

Typical Applications

Acrylic Stud Adhesive is suitable for both residential and commercial construction where plasterboard or fibre cement is used. Applied by hand with a small broadknife, it is used to fix board to timber or steel stud walls and ceilings.

It is not for use in fire rated systems or for walls where tiles will be applied. Adhesive must not be applied at fastener points.

Fixing Systems – for steel and timber framed walls and ceilings



Australian Made

Licensed by Australian Made Campaign Ltd



Superior Adhesion

Good initial grab and excellent adhesion properties



DIY Range

Professional quality in convenient pack sizes



Easy Application

Apply with a stud adhesive applicator

In most situations, the recommended fixing system for interior walls and ceilings is a combination of adhesive, such as Acrylic Stud Adhesive, and permanent fasteners such as nails or screws.

Depending on the characteristics and positioning of the wall or ceiling, various combinations of fixing materials are recommended. For example, the fastener only fixing system is to be used on walls which will be tiled, over existing linings or in fire rated installations. To check which fixing system is best for your application, refer to the **Gyprock Residential Installation Guide**.



Technical Specifications

Product Availability

DIY Acrylic Stud Adhesive is available in a 1kg bucket and has a shelf life of 1 year from date of manufacture.

For product availability and to place an order, contact your **nearest supplier**.

Physical & Chemical properties

Specific gravity (H ₂ O=1)	1.3 - 1.7
VOC content (as specified by GBCA)	22g/L as VOC content per material

Product Manufacture

DIY Acrylic Stud Adhesive is manufactured by CSR Gyprock in Australia to stringent product specifications.

Product Handling

Transportation and manual handling: Refer to the **Gypsum Board Manufacturers of Australia (GBMA) website** for recommended OH&S practices.

Storage: Store buckets of compound in a dry environment out of direct sunlight. Remove lid and stir prior to use. Unused product should be stored by resealing the original bucket. Remix prior to use. Discard if drying has commenced.

Health and Safety

Safety Data Sheets are important documents in the construction industry and assist in the continuing focus on occupational health and safety on and off sites.

Installation Instructions

Installing to Standards

AS/NZS2589: Gypsum linings – Application and Finishing outlines the procedures for jointing and finishing of Gyprock plasterboard in conjunction with additional details contained in Gyprock Technical Literature.

Resources

Gyprock makes available **resources** that provide comprehensive selection, design, installation and maintenance guidance.



Australian Made

Licensed by Australian Made Campaign Limited to use the Australian Made Logo.



Manufactured for Life

Gyprock plasterboard products are manufactured for life with all CSR products designed to achieve optimal performance when part of a CSR integrated system.